

HM 260 Mono Black – 260_{el} / 667_{th} W_p

Monocrystalline PV and thermal panel


Features

- ✓ Optimized solar coverage
Power and Warmth – one module
- ✓ Advanced absorber engineering
for full surface heat absorption
- ✓ Higher efficiency
through active cell cooling
- ✓ Snow-free in winter
Defrosting effect due to water cycle
- ✓ Positive performance variation
From 0W to +5W for a better yield
- ✓ 2Power – Registered Brand
at the German patent and Brand office
- ✓ Product Guarantee: 10 years
Performance Guarantee: 10 years 90% — 25 years 80%
- ✓ **Qualified by TÜV Rheinland**
Quality made in Germany



Technical Data

Testing conditions	STC	NOCT
Nominal voltage (V_{mpp})	30,9 V	29,6 V
Nominal current (I_{mpp})	8,41 A	6,33 A
Open circuit voltage (V_{oc})	37,3 V	34,4 V
Short circuit current (I_{sc})	9,01 A	6,71 A
Electrical power (P_{max})	260 W	187,4 W
Thermal power (P_{max})	667,2 W	488 W
Maximum operating pressure (P_{max})	6 bar	
Max. operating voltage	1000 V	

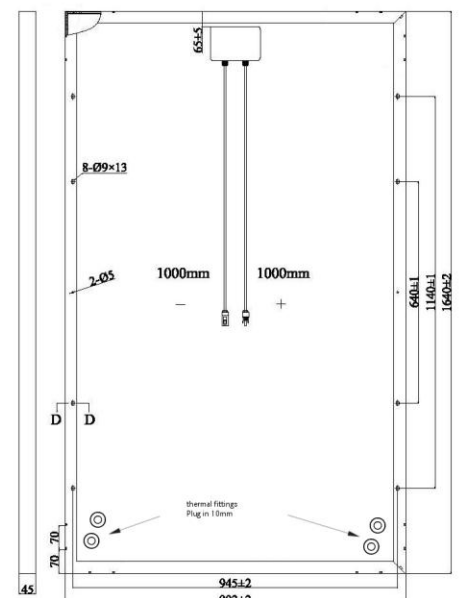

STC: Irradiation 1.000 W/m², panel temperature 25°C, air mass = 1,5
NOCT: Irradiation 800 W/m², ambient temperature 20°C, wind speed 1 m/s